


DOUBLE ROW BALL SLEWING BEARINGS (UNGEARED)

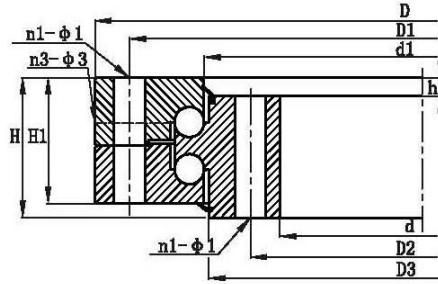

Designations	Boundary dimensions			Bolt hole diameter				Structure dimensions						Basic load ratings coa	Weight
	D	d	H	D1	D2	n	φ	D3 (D3')	d1 (d1')	H1	h	n3	φ3		
	mm			mm		mm		mm						10 ⁴ N	kg
UGDBM 616.384.106	616	384	106	580	420	20	18	523	517	96	26	4	M10x1	121	100
UGDBM 676.444.106	676	444	106	640	480	20	18	583	577	96	26	4	M10x1	134	115
UGDBM 746.514.106	746	514	106	710	550	24	18	653	647	96	26	4	M10x1	153	130
UGDBM 826.594.106	826	594	106	790	630	24	18	733	727	96	26	4	M10x1	173	140
UGDBM 942.658.124	942	658	124	898	702	30	22	828	822	114	29	6	M10x1	230	200
UGDBM 1042.758.124	1042	758	124	998	802	30	22	928	922	114	29	6	M10x1	258	250
UGDBM 1142.858.124	1142	858	124	1098	902	36	22	1028	1022	114	29	6	M10x1	286	300
UGDBM 1262.978.124	1262	978	124	1218	1022	36	22	1148	1142	114	29	6	M10x1	321	340
UGDBM 1426.1074.160	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10x1	482	580
UGDBM 1576.1224.160	1576	1224	160	1524	1272	40	26	1436	1432	150	39	6	M10x1	543	650
UGDBM 1776.1424.160	1776	1424	160	1724	1476	45	26	1636	1632	150	39	8	M10x1	620	750
UGDBM 1976.1624.160	1976	1624	160	1924	1676	45	26	1836	1832	150	39	8	M10x1	692	820
UGDBM 2215.1785.190	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10x1	987	1150
UGDBM 2455.2025.190	2455	2025	190	2389	2091	48	33	2278	2272	178	47	8	M10x1	1110	1500
UGDBM 2715.2285.190	2715	2285	190	2649	2351	56	33	2538	2532	178	47	8	M10x1	1110	1500
UGDBM 3015.2585.190	3015	2585	190	2649	2651	56	33	2838	2832	178	47	8	M10x1	1390	1900
UGDBM 3428.2872.226	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10x1	1870	3300
UGDBM 3828.3272.226	3828	3272	226	3738	3362	56	45	3598	3592	214	56	8	M10x1	2110	3700
UGDBM 4278.3722.226	4278	3722	226	4188	3812	60	45	4048	4042	214	56	10	M10x1	2170	4200
UGDBM 4778.4222.226	4778	4222	226	4688	4312	60	45	4548	4542	214	56	10	M10x1	2670	4700